

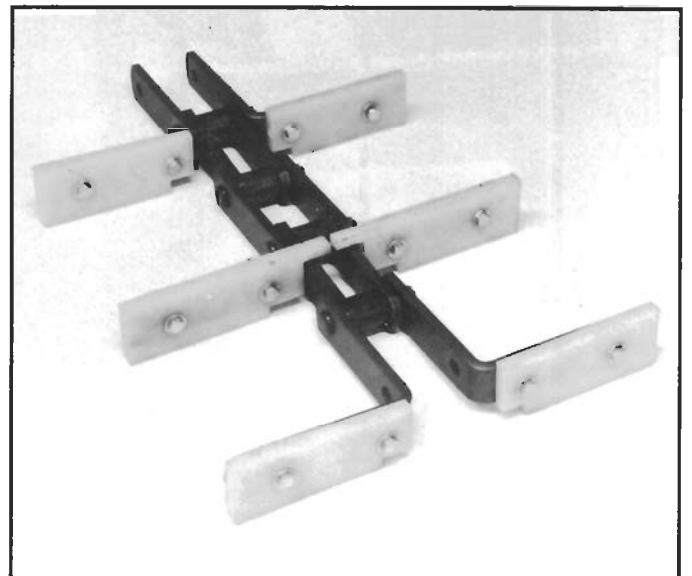


- **2,000 to 36,000 BPH**
- **Horizontal and Inclined Conveyors**

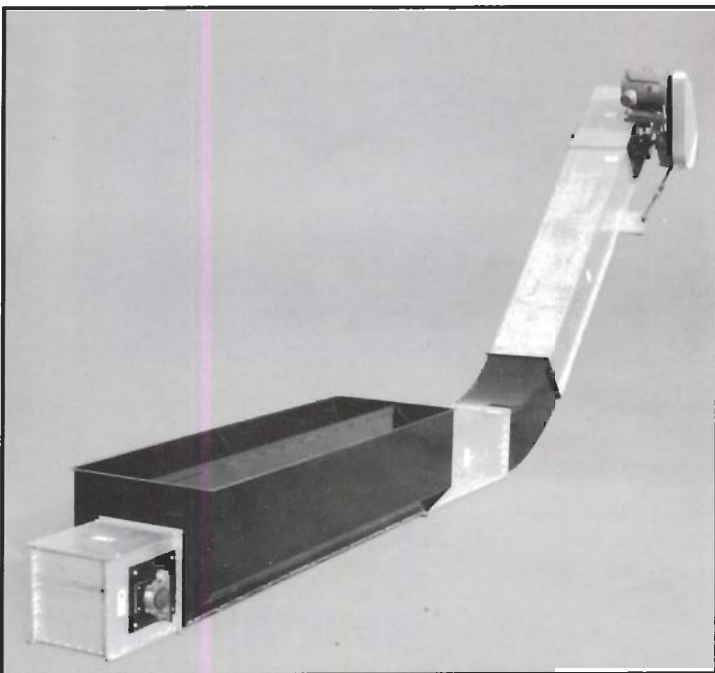


Chains are available in 24,000 to 125,000 lb. average tensile strength.

# Drag Chain Conveyors

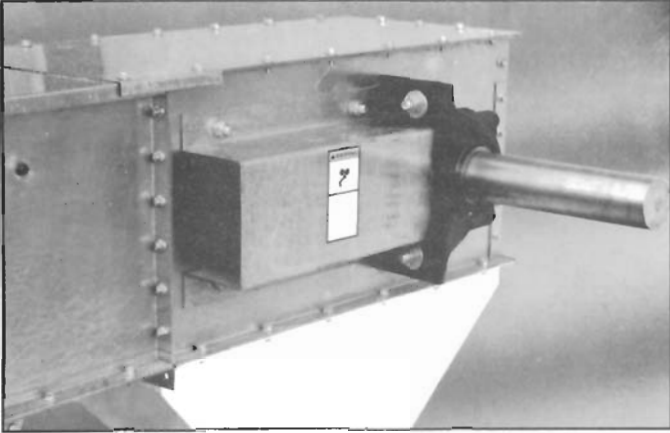


## Head Section

1" flame cut sprockets on 1-15/16" to 6½" shafts (based on conveyor size). HD chain supports. Outboard mount pillow block bearings and UHMW shaft dust seals. Shaft mount Helical Drive can be factory or customer supplied.

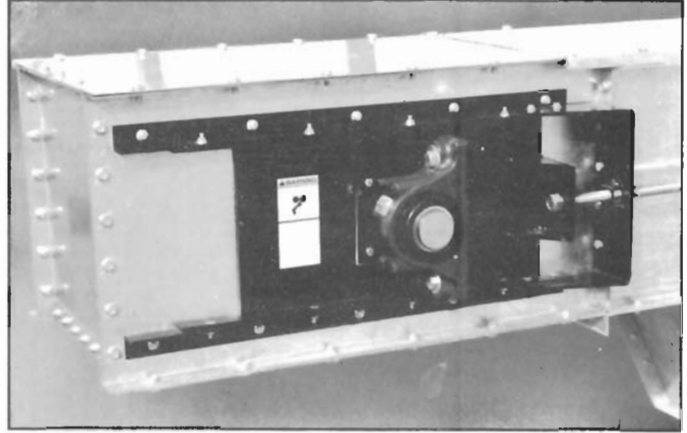


## Tail Section

1" flame cut sprockets on 1-15/16" to 4-15/16" shafts (based on conveyor size). Threaded rods provide chain tension. Urethane paddles are bolted to the chain.

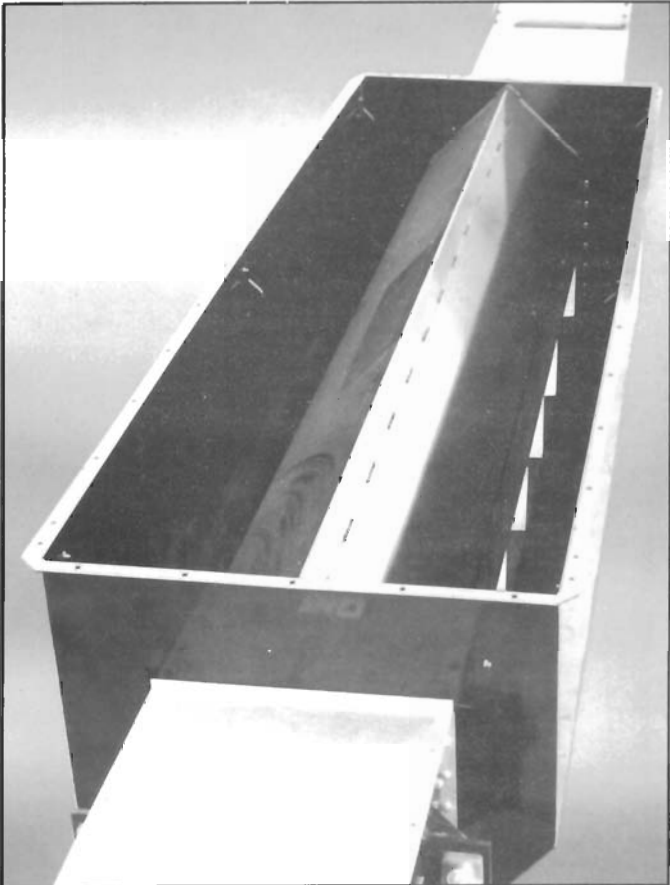


## By-Pass Inlet

For horizontal and inclined applications. 5 and 10 ft. lengths are standard. Special lengths are available.

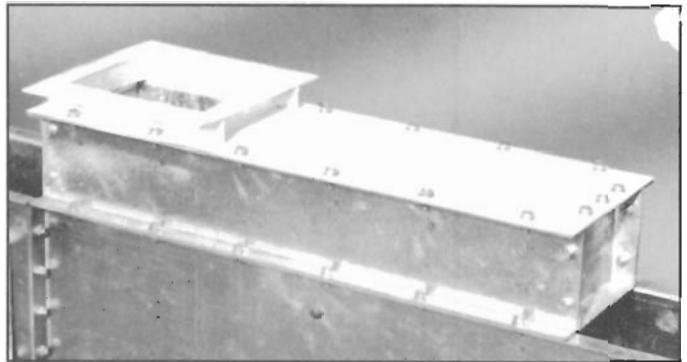

## Inlets

Standard (shown) or Universal Inlets are available. Openings for Universal Inlets are field cut.

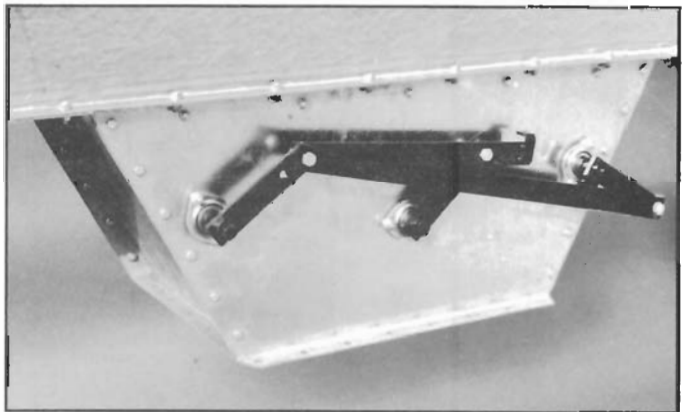

## Outlets

Drop Bottom (here), Plain (top left), or Offset types are available. Drop Bottoms have manual or electric gate openers.

Distributed By:

**SUDENGA  
INDUSTRIES, INC.**

Box 8 • 2002 Kingbird Ave. • George, IA 51237 USA  
1-888-SUDENGA (783-3642) • 1-712-475-3301 • Fax: 1-712-475-3320  
E-mail: sales@sudenga.com • www.sudenga.com