

Sudenga

INDUSTRIES, INC. SINCE 1888


2610 Drive Over Conveyor

- 16" deep trench is open at both ends - no drainage problems.
- 3000, 5000, and 7000 BPH unloading rates.
- Modular design for variable lengths and discharge heights.




Sudenga 2610 Drive Over Conveyors eliminate water problems common in pit installations. The 16" deep trench can be open at both ends for drainage.

Interchangeable intake grating and solid cover let you set up (and change) the intake area on the Conveyor for your particular requirements. You can have an open intake all the way across the drive over area, a center intake for trailers and trucks, or a side intake for wagons. Solid covers used where tires cross the conveyor help keep mud, trash, etc. out of the grain.

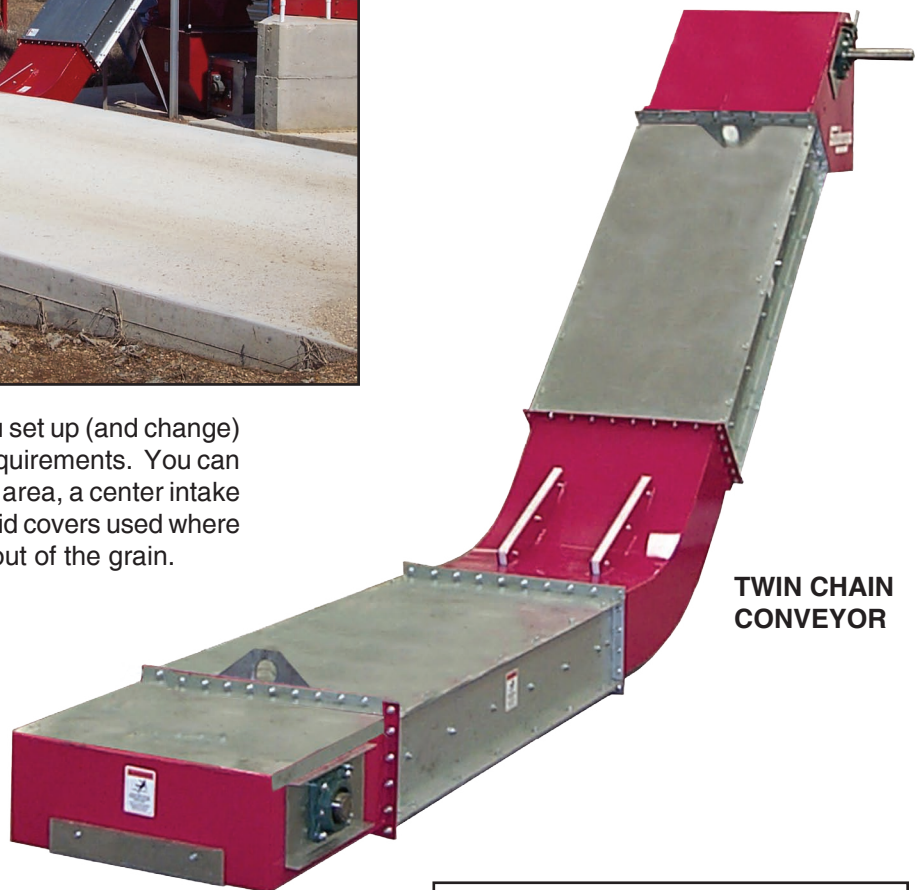



TWIN CHAIN CONVEYOR

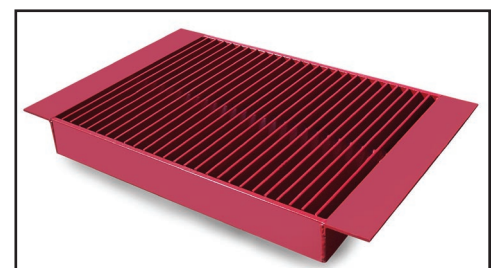

INTAKE GRATING


2610 Drive Over Conveyor

- 10 ga. galvanized Horizontal and Inclined Trunking.
- 10 ga. painted Head, 45° Corner, and Tail Sections.
- Commercial duty shaft mount gear reducer.
- 1-15/16" shaft & 8-tooth sprocket in Head/Tail sections.
- Single Chain or double D81X Chain with polyethylene paddles.
- 11½" deck height.
- Intake grates and solid drive over covers can be repositioned for full width, center, or side discharge situations.
- 12" x 12" outlet to the elevator leg.
- Conveyors require a trough 32" wide and 16" deep.

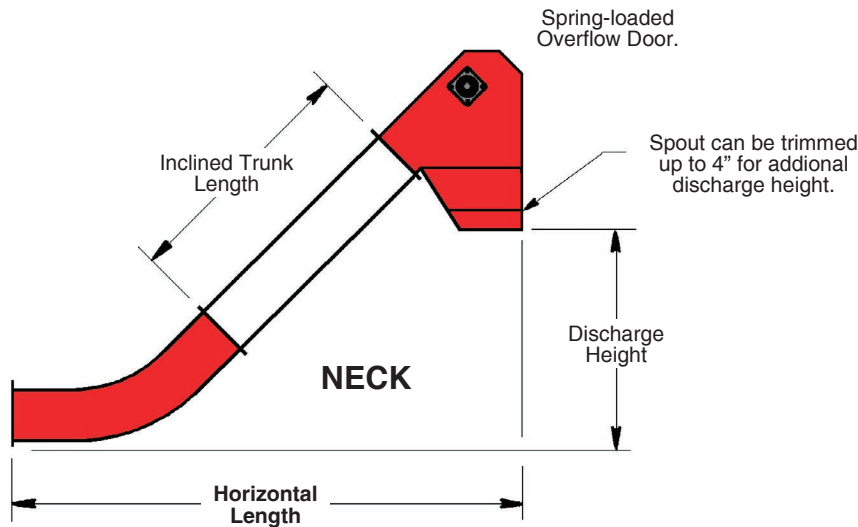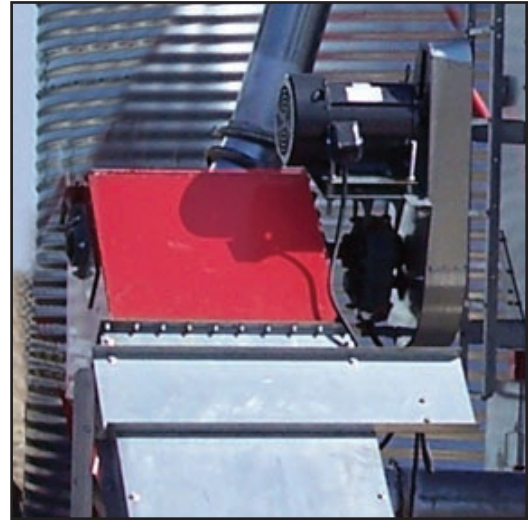

Neck Information

Inclined Trunk Length	Discharge Height	Horizontal Length
13'	9'-11"	14'-8"
12'	9'-3"	14'
11'	8'-6"	13'-3"
10'	7'-10"	12'-7"
9'	7'-1"	11'-10"
8'	6'-5"	11'-2"
7'	5'-8"	10'-5"
6'	5'	9'-9"
5'	4'-5"	9'
4'	3'-7"	8'-4"
3'	2'-10"	7'-7"
2'	2'-2"	6'-11"
1'	1'-5"	6'-3"
0'	9"	5'-6"

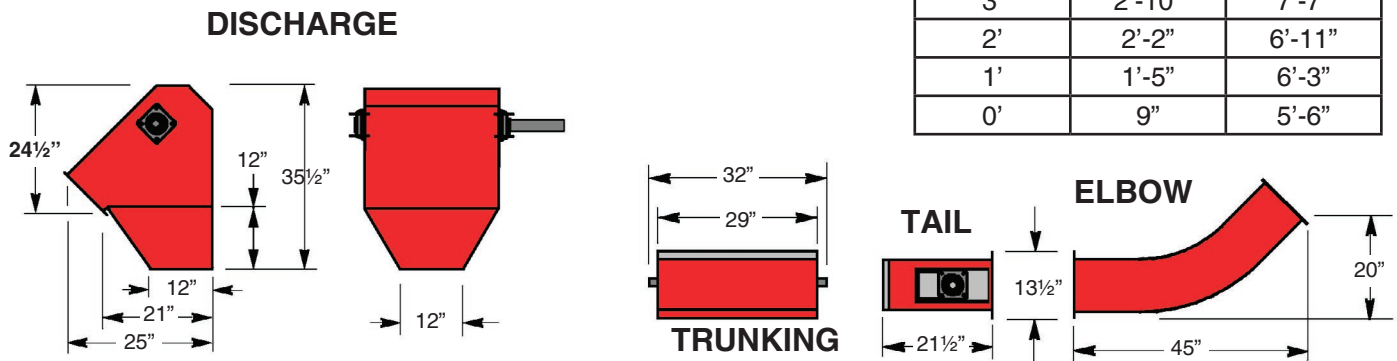

Distributed By:

**SUDENGA
INDUSTRIES, INC.**

Box 8 • 2002 Kingbird Ave. • George, IA 51237 USA
 1-888-SUDENGA (783-3642) • 1-712-475-3301 • Fax: 1-712-475-3320
 E-mail: sales@sudenga.com • www.sudenga.com